


Crefisol Line Oy Patakallionkatu 16 15230 Lahti Finland info@crefisol.fi www.crefisol.fi

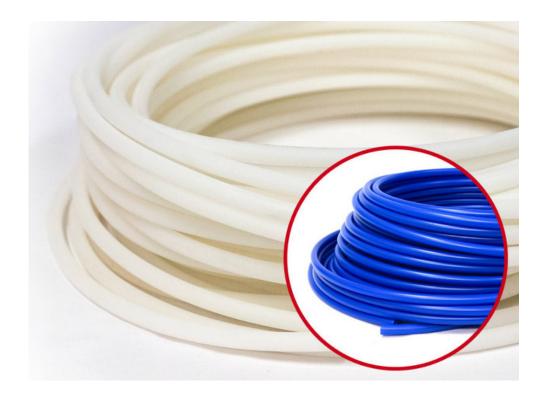

## **Product description**

Pneumatic tube, low density polyethylene PE.

Conventional pipes for air, liquid and gas are intended for use in stable and undemanding conditions.

Standard tube sizes are 6/4mm, 8/6mm, 10/8mm, 10/7mm, 12/10mm and 12/9mm.

## **PE Polyethylene**

Material: PE-LD

**Installation Temperature:** -30 °C...+50 °C **Working Temperature:** -40 °C...+60 °C

Chemical Resistance: Good chemical resistance against gases and liquids

RoHS compliance Halogen Free

## **Operating pressures**

Size	Bending radius	Size	Temperature °C / bar
mm/ø	mm	mm/ø	
outer/inner		outer/inner	:
6/4	24	6/4	20°C/bar31, 40°C/bar23, 60°C/bar17

Burst pressure = 3 x operating pressure